



CERAMIC SLIDING BEARINGS FOR MAGNETIC MIXERS

www.kyocera-fineceramics.eu

CERAMIC SLIDING BEARINGS

In the production of pharmaceuticals, several substances such as powders and liquids are mixed in aseptic equipment. Hence, complete sterility of all mechanical components in such equipment is required. In this type of application magnetic stirrers are commonly used where there is **no mechanical connection** between the motor and the rotor of the stirrer, and the torque is transmitted by means of a magnetic field. Magnetic drive mixers without mechanical seals or stuffing boxes **minimize the risk of contamination** of the final product.

Key components of magnetic mixers are **ceramic sliding bearings** which are in direct contact with the mixed product and additionally are exposed to temperature changes and cleaning chemicals.

Usually the male bearing is made of zirconium oxide and the female bearing is made of silicon carbide. The static, robust male bearing is attached to the vessel's tank plate and the rotating female bearing is integrated and sealed with the mixing head. The inner bearing made of zirconium oxide has increased resistance to impacts and damage from sudden rotor settling or during assembly/disassembly of the mixer. The outer bearing made of silicon carbide provides **superior abrasion resistance and low surface roughness.**

The hardness of both materials ensures **long lifetime and no particle shedding.** The sterility and inertia of the ceramics ensures maximum cleanliness in the tank. Ceramic bearings do not require additional lubrication. The resistance to temperature variations of both ceramics allows the use of **cleaning and sterilization in place (CIP/SIP).**

When buying bearings from Kyocera, both ceramic materials come from a single source, which guarantees full material traceability. Both materials are perfectly matched to each other with strict tolerances and surface requirements. Thanks to our extensive mechanical machining facility we can achieve high quality surfaces with minimal friction in the operating mode and with **reduced breakage risk in dry run conditions.** For various designs and mounting solutions, we can produce ceramic threads or shrink fit ceramic in metal housings. For many years our bearings have been supplied to the largest manufacturers of magnetic mixers for critical pharmaceutical applications. All of our materials employed for magnetic mixers **comply with applicable FDA requirements and USP Class VI classifications.**

Kyocera supports you in finding the best ceramic solution for your mixing needs.




Female bearing made of silicon carbide StarCeram® SSiC, male bearing made of zirconium oxide FZM



Male bearing made of silicon carbide StarCeram® SSiC



Shrink fit ceramic in metal housing

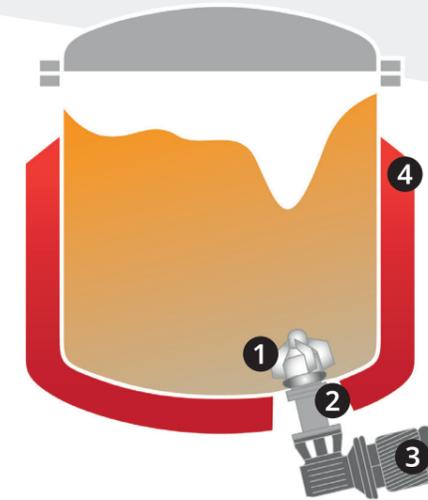

- 1 Impeller magnet
- 2 Magnetic drive assembly
- 3 Geared motor
- 4 Vessel

Combination of zirconium oxide FZM and silicon carbide StarCeram® S

- ▶ Zirconium oxide (FZM) is used because of high impact resistance (high flexibility/low E-Modulus)
- ▶ Silicon carbide (SSiC) is used because of hardness and wear resistance

Why ceramics?

Ceramic bearings are one of the most critical parts in the mixer:

- ▶ Direct contact with the high value product (product lubricated)
- ▶ Exposure to cleaning chemicals and temperature cycling

Main advantages

- ▶ Corrosion and abrasion resistance against mixed media
- ▶ No grinding between metal parts
- ▶ Biocompatibility: complying with FDA rules and USP Class VI certification required for pharmaceutical and biotechnology industries
- ▶ Good thermo shock resistance CIP /SIP possible (clean in place / sterilization in place)
- ▶ Perfect finish and surface quality Ra < 0,5 µm
- ▶ No product residue or bacterial growth
- ▶ Low shear forces (particle generation below detectable levels)
- ▶ Minimalized drag force
- ▶ Emergency dry run possible
- ▶ Tight tolerances for perfect coupling between bearings (up to 5 µm)
- ▶ Simple design eliminates entrapments of product (no product stagnation between bearing surfaces)
- ▶ Easy maintenance - ceramic bearing parts can be replaced by users on site

Our strenghts

- ▶ Long term proven quality in application
- ▶ One source for both ceramic materials
- ▶ High precision grinding technologies
- ▶ Metal-ceramic joints or threads in ceramics possible

Material properties

| Properties | Unit | FZM | StarCeram® S | Metal |
|---|----------------------|------------------------|-----------------|------------------|
| Main components | - | ZrO ₂ , MgO | SiC | Stainless steel |
| Properties of microstructure | | | | |
| Density | g/cm ³ | ≥ 5.70 | 3.16 | 7.8 |
| Open porosity | Vol. % | 0 | 0 | 0 |
| Water absorption | % | 0 | 0 | - |
| Average crystal size | µm | 50 | - | - |
| Mechanical properties | | | | |
| Hardness (DPH/HRC) | GPa | 10.7 | 23 | 61 |
| Compressive strength | MPa | 2000 | - | 1700 |
| Bending strength σ_m | MPa | 500 (DIN EN 843-1) | 450 | 2300 |
| Modulus of elasticity (E-modulus) | GPa | 185 (static) | 440 | 210 |
| Poisson ratio | - | 0.3 | 0.17 | 0.3 |
| Fracture toughness K_{Ic} | MPa*m ^{0.5} | 6.3 (SEVNB) | 2-3 | - |
| Thermal properties | | | | |
| Max. operating temperature | °C | 900 | 1400 | 120-280 |
| Specific heat 20 °C | J/(kg*K) | 400 | 670 | 502 |
| Thermal conductivity | W/(m*K) | 3 | 200 | 45 |
| Thermal expansion coefficient 20-300 °C | 10 ⁻⁶ /K | 10.6 | 4.4 | 12 |
| Electrical properties | | | | |
| Specific electrical resistance 20 °C | Ω·cm | 10 ¹⁰ | 10 ⁸ | 10 ⁻⁶ |
| Typical colour | - | yellow | black | - |



Stirrers made of alumina



Male bearing assembly on tank plate

About Kyocera

Headquartered in Kyoto, Japan, Kyocera is one of the world leaders in the manufacturing of ceramic components and products, with an extensive range of applications. Kyocera now provides over 200 kinds of ceramic materials including oxide, non-oxide and some special composites, with cutting edge technology and services designed to meet the individual needs. Our long-standing experience in the field of ceramics is applied in the production of very precise, high quality products used in multiple fields.

With the acquisition of two finceramics manufacturing assets in 2019, Kyocera is able to respond quickly to clients in Europe, satisfying the growing market demand for finceramic components. Kyocera provides solutions expertise in the field of high-performance ceramics from engineering through rapid prototyping to serial production, from very precise components to complex shaped parts of various sizes and dimensions for challenging applications. Kyocera provides system components for advanced technology applications in fields of electronic and sensor technology, machinery and equipment, laboratory and analytics, medical treatment and semiconductor industry.

The ceramic expert with material expertise of more than 60 years has supplied the bearings for many years to the largest manufacturers of magnetic mixers for essential pharmaceutical and food applications.



Production site and sales office:

KYOCERA Fineceramics Solutions GmbH

Steinzeugstrasse 92
68229 Mannheim / Germany
Tel: +49 (0)621 40 54 7-400
E-mail: info@kyocera-solutions.de
www.kyocera-solutions.de

Sales office Northern Europe:

KYOCERA Fineceramics Nordics AB

Stormbyvägen 6
163 55 Spånga / Sweden
Tel: +46 (0)8 44 66-910
E-mail: info@kyocera-solutions.se
www.kyocera-solutions.se

Production site and sales office:

KYOCERA Fineceramics Precision GmbH

Lorenz-Hutschenreuther-Strasse 81
95100 Selb / Germany
Tel: +49 (0)9287 807-0
E-mail: info@kyocera-precision.com
www.kyocera-precision.com

European headquarters:

KYOCERA Europe GmbH

Fritz-Müller-Strasse 27
73730 Esslingen / Germany
Tel: +49 (0)711 93 93 4-0
E-mail: info.fc@kyocera.de
www.kyocera-fineceramics.eu